



D . (1011				
RO	Rosario 6'8"			
	All dimensions nominal before prefit and bevel.			
DW	Α	В		
3-0	23.69	6.15		
2-10	21.69	6.15		
2-8	21.69	5.15		
2-6	19.69	5.15		
2-4	17.69	5.15		
2-2	15.69	5.15		
2-0	15.69	4.15		
1-10	15.69	3.15		
1-8	11.96	4.02		
1-6	11.96	3.02		
1-4	7.08	4.46		
Bottom rail dimension does not comply with ADA requirements.				

Rosario (Caiman) Molded Profile Door



A04-00042 01/15/19

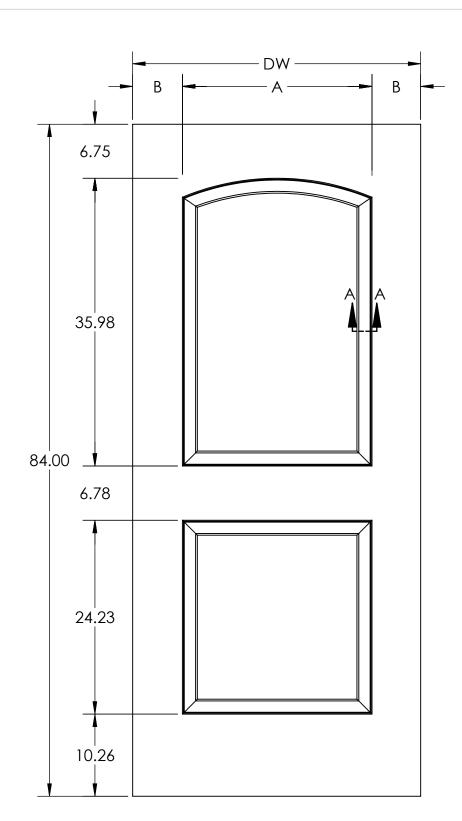



Rosario 7'0''				
	All dimensions nominal before prefit and bevel			
DW	Α	В		
3-0	23.69	6.15		
2-10	21.69	6.15		
2-8	21.69	5.15		
2-6	19.69	5.15		
2-4	17.69	5.15		
2-2*	17.69	4.15		
2-0	15.69	4.15		
1-10	15.69	3.15		
1-8	11.96	4.02		
1-6	11.96	3.02		
1-4**	7.08	4.46		
Bottom rail dimension complies with ADA				

complies with ADA requirements.

Rosario (Caiman) Molded Profile Door




DIMENSIONS ARE IN: Inche: DOOR TOLERANCES WIDTH (FULL WIDTH): ±1/16 WIDTH (PREFIT): ±1/32 HEIGHT: ±1/16 SQUIJARE: +1/8


THE INFORMATION CONTAINED IN HIS DIKAWING IS HE
SOLE PROPERTY OF Flynden Door, Inc. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF Lynden Door, Inc. IS PROHIBITED.

A04-00042 01/15/19

^{*} Contact factory regarding availability of wider stile options.

^{**} Non-Stock, Contact factory for pricing and availability.

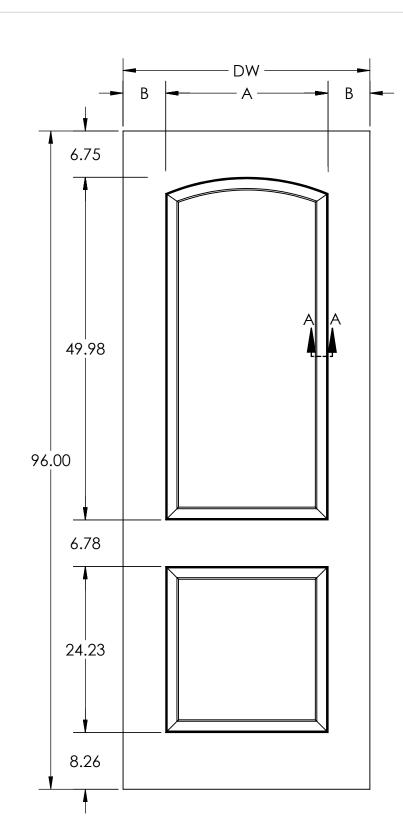





Rosario 8'0"			
All dimensions nominal before prefit and bevel.			
DW	Α	В	
3-0	23.69	6.15	
2-10	21.69	6.15	
2-8	21.69	5.15	
2-6	19.69	5.15	
2-4	17.69	5.15	
2-2	17.69	4.15	
2-0	15.69	4.15	
1-10	15.69	3.15	
1-8	11.96	4.02	
1-6	11.96	3.02	
Bottom rail dimension does not comply with ADA requirements.			

Rosario (Caiman) Molded Profile Door



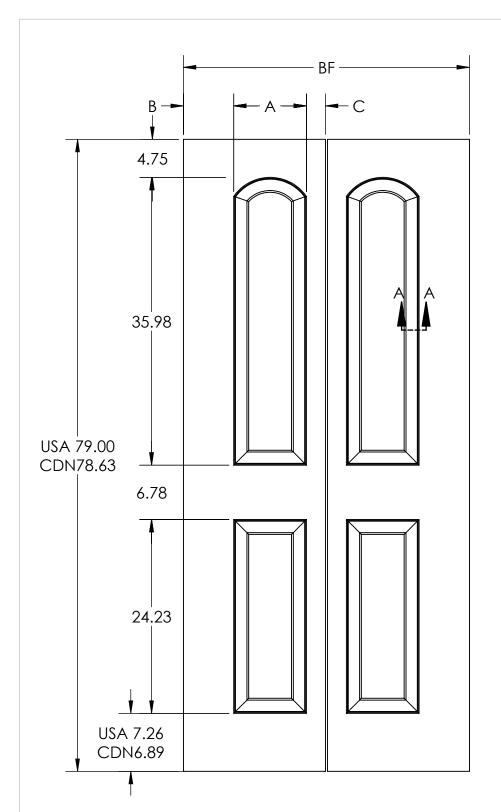



Rosario Bifold 6'8"			
BF	Α	В	С
3-0	9.09	6.29	2.37
2-8	9.09	4.29	2.37
2-6	9.09	3.29	2.37
2-4	9.09	2.29	2.37
2-0	6.79	3.18	1.78
1-8	6.79	1.78	1.18
1-6	6.79	1.03	0.93

Use of heavy duty hardware may require additional undercut. Lynden Door standard is 3/4"


Rosario (Caiman)
Molded Profile Bifold




DIMENSIONS ARE IN: Inches DOOR TOLERANCES WIDTH (FULL WIDTH): ±1/16 WIDTH (PREFIT): ±1/32 HEIGHT: ±1/16 SOULABE: ±1/8

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Lynden Door, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Lynden Door, Inc. IS PROHIBITED.

A04-00042 01/15/19

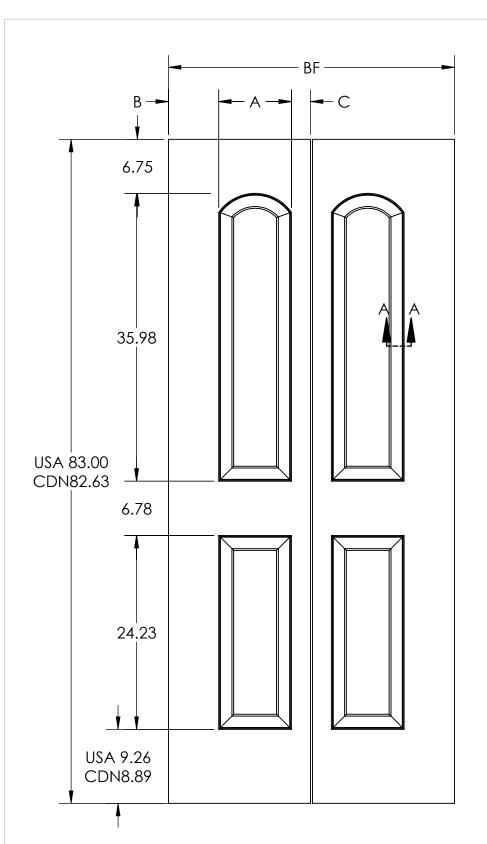



Rosario Bifold 7'0"			
BF	Α	В	С
3-0*	9.09	6.29	2.37
2-8*	9.09	4.29	2.37
2-6*	9.09	3.29	2.37
2-4*	9.09	2.29	2.37
2-0*	6.79	3.18	1.78
1-8*	6.79	1.78	1.18
1-6*	6.79	1.03	0.93

Use of heavy duty hardware may require additional undercut. Lynden Door standard is 3/4"


* Non-Stock, Contact factory for pricing and availability.


Rosario (Caiman)
Molded Profile Bifold



DIMENSIONS ARE IN: Inches DOOR TOLERANCES WIDTH (FULL WIDTH): ±1/16 WIDTH (PREFIT): ±1/32 HEIGHT: ±1/16 SQUIJARE: +1/8

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Lynden Door, Inc. ANY ERPRODUCTION IN PARTOR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Lynden Door, Inc. IS PROHIBITED. $A04{-}00042 \ \ 01/115/19$

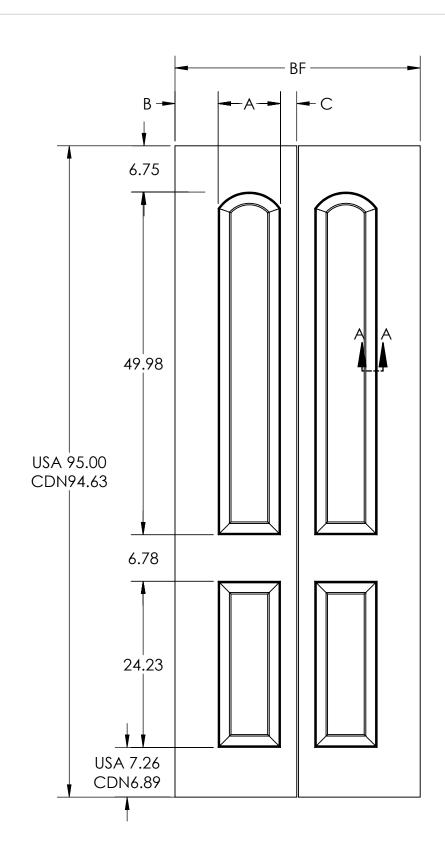



Rosario Bifold 8'0"			
BF	Α	В	С
3-0*	9.09	6.29	2.37
2-8*	9.09	4.29	2.37
2-6*	9.09	3.29	2.37
2-4*	9.09	2.29	2.37
2-0*	6.79	3.18	1.78
1-8*	6.79	1.78	1.18
1-6*	6.79	1.03	0.93

Use of heavy duty hardware may require additional undercut. Lynden Door standard is 3/4"

* Non-Stock, Contact factory for pricing and availability.

Rosario (Caiman)
Molded Profile Bifold



DIMENSIONS ARE IN: Inches DOOR TOLERANCES WIDTH (FULL WIDTH): ±1/16 WIDTH (PREFIT): ±1/32 HEIGHT: ±1/16 SOULABE: ±1/8

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Lynder Door, Inc., ANY ERPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PREMISSION OF Lynden Door, Inc., IS PROHIBITED. $A04{-}00042 \ \ 01/115/19$